


This document has been downloaded from:



The largest resource for amusement machines
documentation on the world wide web!



FLIPPERSPILL.COM

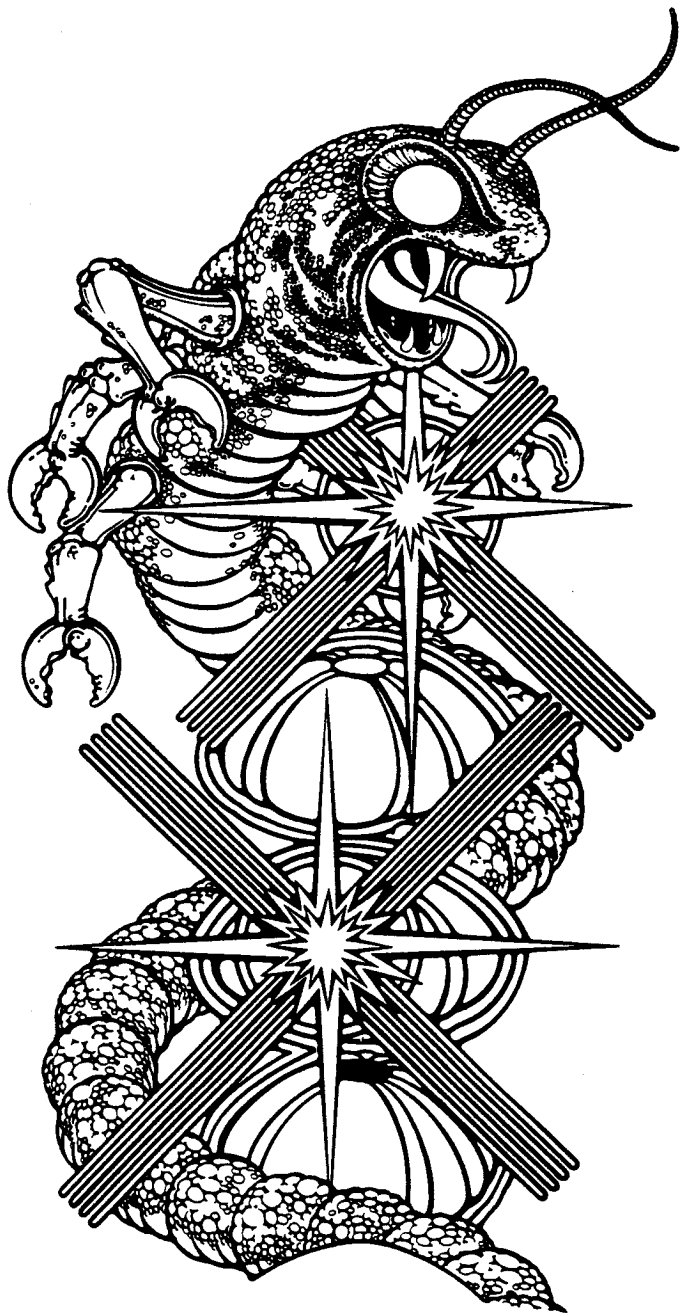

Signature Analysis Guide to **CENTIPEDE™**

© 1981 Atari, Inc.



ATARI INC 1265 BORREGAS AVENUE P.O. BOX 427 SUNNYVALE, CA 94086 (408) 745-2000



A Warner Communications Company

Signature Analysis for Centipede™

Table of Contents

1. Set-Up for Signature Analysis
2. Checking Address Lines
3. Checking Address Decoder
4. Checking ROM and Data Lines
5. Checking Horizontal Sync
6. Checking Vertical Sync

1. Set-Up for Signature Analysis

A. CAT Box Preliminary Set-Up

1. Remove:
 - The electrical power from the game.
 - The wiring harness from the game PCB.
 - The game PCB from the cabinet.
 - The MPU chip C2 from the game PCB.
2. Connect:
 - The extender cables to the game PCB and the wiring harness.
 - Pins 37 to 39 on the MPU socket with a piece of 28 AWG wire.
 - The CAT Box flex cable to the game PCB test edge connector.

B. Signature Analysis Procedure

1. Connect the three BNC to E-Z clip cables (supplied with the CAT Box) to the SIGNATURE ANALYSIS CONTROL START, STOP, and CLOCK jacks on the CAT Box.
2. Attach the three black E-Z clips to a ground loop on the Centipede™ game PCB.
3. Attach the CAT Box data probe to the DATA jack on the CAT Box.
4. The colored E-Z clips on the cables will be moved about for each group of signatures to be taken. The set-up for each group of signatures is located on the schematic sheet near the device to be checked. The signatures are located on or near the signal point on the schematic.

5. Set the CAT Box switches as follows:
 - a. TESTER MODE: SIG
 - b. TESTER SELF-TEST: OFF
 - c. PULSE MODE: LATCHED
 - d. START: As indicated
 - e. STOP: As indicated
 - f. CLOCK: As indicated

6. Power up the game board and the CAT Box.

2. Checking Address Lines

A. CAT Box Settings for Address Test

<i>Probe</i>	<i>Trigger</i>	<i>IC-Pin</i>	<i>Test Pt.</i>
Start		C2-25	
Stop		C2-25	
Clock		C2-39	Φ2

B. Signatures

<i>Logic Probe on IC-Pin</i>	<i>Signal Name</i>	<i>Signature Should Be</i>
C1-12	AB0	UUUU
C1-14	AB1	5555
C1-16	AB2	CCCC
C1-18	AB3	7F7F
C1-9	AB4	5H21
C1-7	AB5	0AFA
C1-5	AB6	UPFH
C1-3	AB7	52F8
B1-12	AB8	HC89
B1-14	AB9	2H70
B1-16	AB10	HPP0
B1-5	AB11	1293
B1-3	AB12	HAP7
C2-23	A13	3C96
C2-24	A14	3827
C2-25	A15	755U

3. Checking Address Decoder

A. CAT Box Settings for Address Decoder Test

Probe	Trigger	IC-Pin	Test Pt.
Start		C2-25	
Stop		C2-25	
Clock		C2-39	Φ2

B. Signatures

Logic Probe on IC-Pin	Signal Name	Signature Should Be
K3-10		3C97
J3-8	<u>ROM</u>	3C97
J2-9	<u>ROM3</u>	51U7
J2-10	<u>ROM2</u>	2960
J2-11	<u>ROM1</u>	5P33
J2-12	<u>ROM0</u>	1H32
H3-11		A8H2
H3-10		C5P1
H3-9		U550
H3-7		9UC6
H3-6		0UA5
H3-5	<u>POKEY</u>	F733
H3-4		4231
H3-3	<u>SWRD</u>	3580
H3-2	<u>PF</u>	4P5C
H3-1	<u>RAM0</u>	A00H
J3-11		F6HP
C5-8		F97A
C4-6	<u>EA READ</u>	0099
C4-5	<u>EA CONTROL</u>	U08U
C4-4	<u>EA ADDR</u>	HF7A
E3-3	<u>IN0</u>	0294
K3-12		5554
E3-6	<u>IN1</u>	40A4
E3-8	<u>PFRAMRD</u>	4P5C

For the following four tests, ground J2, pin 1:

J2-7	<u>PFWR3</u>	11U6
J2-6	<u>PFWR2</u>	1C3F
J2-5	<u>PFWR1</u>	4FH7
J2-4	<u>PFWR0</u>	461F

4. Checking ROM and Data Lines

A. CAT Box Settings for ROM0 Test (I.C. D1)

Probe	Trigger	IC-Pin	Test Pt.
Start		D1-20	<u>ROM0</u>
Stop		D1-20	<u>ROM0</u>
Clock		C2-39	Φ2

To obtain stable signatures from ROM0, it may be necessary to install a 1000 pf capacitor from K3-11 to ground.

B. Signatures

Logic Probe on IC-Pin	Signal Name	Signature Should Be
D1-9	DB0	5AF2
D1-10	DB1	3276
D1-11	DB2	48UH
D1-13	DB3	P316
D1-14	DB4	PF7A
D1-15	DB5	H973
D1-16	DB6	3F34
D1-17	DB7	U638

C. CAT Box Settings for ROM1 Test (I.C. E1)

Probe	Trigger	IC-Pin	Test Pt.
Start		E1-20	<u>ROM1</u>
Stop		E1-20	<u>ROM1</u>
Clock		C2-39	Φ2

To obtain stable signatures from ROM1, it may be necessary to install a 1000 pf capacitor from K3-11 to ground.

D. Signatures

Logic Probe on IC-Pin	Signal Name	Signature Should Be
E1-9	DB0	13PH
E1-10	DB1	C4P5
E1-11	DB2	11F3
E1-13	DB3	098P
E1-14	DB4	5H24
E1-15	DB5	0548
E1-16	DB6	33P7
E1-17	DB7	80AA

E. CAT Box Settings for Address Decoder Test (I.C. F/H1)

Probe	Trigger	IC-Pin	Test Pt.
Start		F/H1-20	<u>ROM2</u>
Stop		F/H1-20	<u>ROM2</u>
Clock		C2-39	$\Phi 2$

F. Signatures

Logic Probe on IC-Pin	Signal Name	Signature Should Be
F/H1-9	DB0	CU62
F/H1-10	DB1	9553
F/H1-11	DB2	7756
F/H1-13	DB3	A7CF
F/H1-14	DB4	6081
F/H1-15	DB5	5HAC
F/H1-16	DB6	6U43
F/H1-17	DB7	F83H

G. CAT Box Settings for ROM3 Test (I.C. J1)

Probe	Trigger	IC-Pin	Test Pt.
Start		J1-20	<u>ROM3</u>
Stop		J1-20	<u>ROM3</u>
Clock		C2-39	$\Phi 2$

H. Signatures

Logic Probe on IC-Pin	Signal Name	Signature Should Be
J1-9	DB0	476H
J1-10	DB1	2A2C
J1-11	DB2	2337
J1-13	DB3	FP07
J1-14	DB4	A9AF
J1-15	DB5	12HA
J1-16	DB6	2367
J1-17	DB7	8P82

5. Checking Horizontal Sync (Synchronizer)

A. CAT Box Settings for P2 Counter Test

Probe	Trigger	IC-Pin
Start		P2-11
Stop		P2-11
Clock		P2-2

B. Signatures

Logic Probe on IC-Pin	Signal Name	Signature Should Be
P2-15	—	0102
P2-14	6MHz	55H1
P2-13	1H	334U
P2-12	2H	0U16
K4-11	—	0102
N1-6	<u>6MHz</u>	ACA2

C. CAT Box Settings for N2 Counter Test

Probe	Trigger	IC-Pin
Start		N2-11
Stop		N2-11
Clock		P2-2

D. Signatures

Logic Probe on IC-Pin	Signal Name	Signature Should Be
N2-15	—	C3F2
N2-14	8H	7P25
N2-13	16H	85PA
N2-12	32H	77F7

E. CAT Box Settings for M2 Counter Test

Probe	Trigger	IC-Pin
Start		M2-13
Stop		M2-13
Clock		P2-2

F. Signatures

Logic Probe on IC-Pin	Signal Name	Signature Should Be
M2-15	—	FH5F
M2-14	128H	4596
N1-10	—	CC34
M3-8	—	1979
M3-5	HSYNC	P77U
M3-6	<u>HSYNC</u>	309C
M4-3	256H2D	2633
M4-15	256HD	A829
M4-14	<u>256HD</u>	7UFH
N1-4	<u>4H</u>	H93H
L4-3	COLOREN	A829
L4-2	—	7UFH
L8-11	<u>HBLANK</u>	8304
D4-8	—	24U5

6. Checking Vertical Sync (Synchronizer)

A. CAT Box Settings for P3 Counter Test

<i>Probe</i>	<i>Trigger</i>	<i>IC-Pin</i>
Start		P3-11
Stop		P3-11
Clock		P2-2

B. Signatures

<i>Logic Probe on IC-Pin</i>	<i>Signal Name</i>	<i>Signature Should Be</i>
P3-15	—	H7P4
P3-14	1V	3F3U
P3-13	2V	UUCG
P3-12	4V	2A42

C. CAT Box Settings for N3 Counter Test

<i>Probe</i>	<i>Trigger</i>	<i>IC-Pin</i>
Start		N3-11
Stop		N3-11
Clock		P2-2

D. Signatures

<i>Logic Probe on IC-Pin</i>	<i>Signal Name</i>	<i>Signature Should Be</i>
N3-14	16V	239F
N3-13	32V	6U0H
N3-12	64V	U047
P4-9	—	F91U
P4-10	—	5890
P4-11	—	108A
P4-12	—	FUU7
N4-10	VBLANK	9H7H
N4-11	<u>VBLANK</u>	C697
N4-6	<u>VRESET</u>	94FP
N4-2	<u>VSYN</u>	F5U6
N4-3	<u>VSYN</u>	PP1F
M4-10	<u>VBLANKD</u>	8F15