

OPERATOR'S MANUAL

This document has been downloaded from:






SETTING EXPLANATION

OPCB CONNECTOR

JAMMA STANDARD

OCRT MONITOR

HORIZONTAL SCREEN

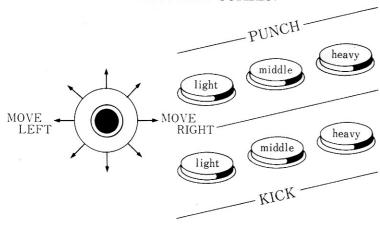


08-WAY JOYSTICK

MOVES PLAYER TO UP/DOWN,

LEFT/RIGHT AND OTHER DIRECTIONS.

OPOSITIONS OF DIP SW (THERE ARE 2 TYPES OF PCB)



JAMMA STANDARD

SOLDER SIDE		-	COMPONENTS SIDE
GND	A	1	GND
GND	В	2	GND
+5V	С	3	+5V
+5V	D	4	+5V
N.C.	Е	5	N.C.
+12V	F	6	+12V
	Н	7	
COIN COUNTER 2	J	8	COIN COUNTER 1
(COIN LOCK OUT 2)	K	9	(COIN LOCK OUT 1)
SP(-)	L	10	SP(+)
N.C.	M	11	N.C.
VIDEO GREEN	N	12	VIDEO RED
VIDEO SYNC	Р	13	VIDEO BLUE
SERVICE SW	R	14	VIDEO GND
	S	15	TEST SW
COIN SW 2	T	16	COIN SW 1
START SW 2	U	17	START SW 1
2P UP	V	18	1P UP
2P DOWN	W	19	1P DOWN
2P LEFT	X	20	1P LEFT
2P RIGHT	Y	21	1P RIGHT
2P PUNCH (light)	Z	22	1P PUNCH
2P PUNCH	a	23	1P PUNCH
2P PUNCH	b	24	1P PUNCH
N.C.	c	25	N.C.
N.C.	d	26	N.C.
GND	e	27	GND
GND	f	28	GND


• PARTS NAME

CR7E-56DA-3.96E: (HIROSE)

OR

1168-056-009 : (KEL)

●HOW TO CONNECT THE ATTACHED HARNESS LINES

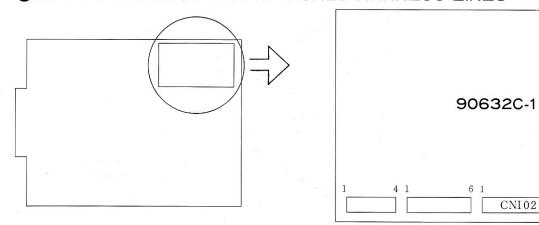

10 1

10

CNI 02 10 PIN GND 1 BLACK GND 2 BLACK PURPLE 1P KICK LIGHT 3 1P KICK MIDDLE GRAY 1P KICK HEAVY WHITE 5 N.C. 6 7 2P KICK LIGHT ORANGE 2P KICK MIDDLE GREEN 2P KICK HEAVY BLUE

N.C.

10

●DIP SW(A)

ITEM	DESCRIPTION	1	2	3	4	5	6	7	8
4	1COIN 1CREDIT	OFF	OFF	OFF					
	1COIN 2CREDITS	ON	OFF	OFF					
	1COIN 3CREDITS	OFF	ON	OFF					
COIN 1	1COIN 4CREDITS	ON	ON	OFF			/		
COIN I	1COIN 6CREDITS	OFF	OFF	ON					
	2COINS 1CREDIT	ON	OFF	ON					
	3COINS 1CREDIT	OFF	ON	ON					
	4COINS 1CREDIT	ON	ON	ON					
4	1COIN 1CREDIT				OFF	OFF	OFF		
	1COIN 2CREDITS	10			ON	OFF	OFF		
	1COIN 3CREDITS				OFF	ON ·	OFF		2
COIN 2	1COIN 4CREDITS				ON	ON	OFF		
COIN 2	1COIN 6CREDITS				OFF	OFF	ON	ė.	
	2COINS 1CREDIT		*1		ON	OFF	ON		
	3COINS 1CREDIT				OFF	ON	ON		
	4COINS 1CREDIT				ON	ON	ON		
CONTINUE COIN	NORMAL							OFF	
	CONTINUE COIN							ON	
NO USE	2 S								OFF
				3					ON

^{**}WHEN CONTINUE IS ON, GAME STARTS WITH 2 COINS AND CONTINUES WITH 1 COIN. IN THIS CASE, SETTINGS OF COIN 1 AND COIN 2 ARE MEANINGLESS.

**BOLDFACE INDICATES FACTORY SETTING.

ODIP SW(B)

ITEM	DESCRIPTION	1	2	3	4	5	- 6	7	8
	EASY 0	OFF	OFF	OFF					
	1	ON	OFF	OFF					
a a	2	OFF	ON	OFF					
DIFFICULTY	NORMAL 3	ON	ON	OFF			(a)	2	
DIFFICULTI	4	OFF	OFF	ON					
	5	ON	OFF	ON					
	6	OFF	ON	ON					
	DIFFICULT 7	ON	ON	ON					

*DIFFICULTY LEVEL IS SET TO NORMAL AT THE TIME OF DELIVERY.

**BOLDFACE INDICATES FACTORY SETTING.

●DIP SW(C)

ITEM	DESCRIPTION	1 2	3	4	5	6	7	8
FREE PLAY	NOT FREE PLAY		OFF					33
	FREE PLAY	T-0000000 -2	ÔN		12		8	
SCREEN STOP	NORMAL			OFF				
	PAUSE			ON			-87	
SCREEN FLIP	NORMAL		5		OFF.	. "	22	
	FLIP				ON			
SOUND DURING	OFF		827			OFF		
DEMONSTRATION MODE	ON				10	ON		
CONTINUE MODE	OFF						OFF	
	ON				201		ON	
TEST MODE	GAME MODE		B I	s.				OFF
	TEST MODE			100	7/2			ON

*BOLDFACE INDICATES FACTORY SETTING.

*POWER DOWN AFTER CHANGING DIP SWITCHES.

*MAKE SURE THE POWER IS OFF BEFORE CHANGING DIP SWITCHES.

*NO USE DIP SWITCH SHOULD BE KEPT ON "OFF".



No. 1-12, TOKIWAMACHI 2-CHOME, CHUO-KU, OSAKA 540, JAPAN TEL (06) 946-2058 (FAX NO. 06-946-6657)