

■ SCHEMATIC NOTES

UNLESS OTHERWISE SPECIFIED
 RESISTANCE: (L) (K) (M) (W)
 CARBON RESISTOR
 CAPACITANCE: 1 OR HIGHER (pF), LESS THAN 1 (μF)
 WORKING VOLTAGE → 50 (V)
 CERAMIC CAPACITOR
 INDUCTANCE: (μH)
 ELECTROLYTIC CAP: CAPACITANCE VALUE
 (μF)/WORKING VOLTAGE (V),
 NP → NON-POLAR (OR B POLAR)
 ELECTROLYTIC CAP.


REFER TO THE PARTS LIST FOR ADDITIONAL COMPONENT INFORMATION.

⊙ INDICATES TEST POINT CONNECTION

⊥ INDICATES CHASSIS GROUND UNLESS OTHERWISE SPECIFIED

Hz INDICATES CYCLES PER SECOND

FOR SAFETY PURPOSES (AND CONTINUING RELIABILITY)
 REPLACE MARKED COMPONENTS WITH SAFETY
 SYMBOL WITH IDENTICAL TYPE.
 NOTE: FR → FUSIBLE RESISTOR

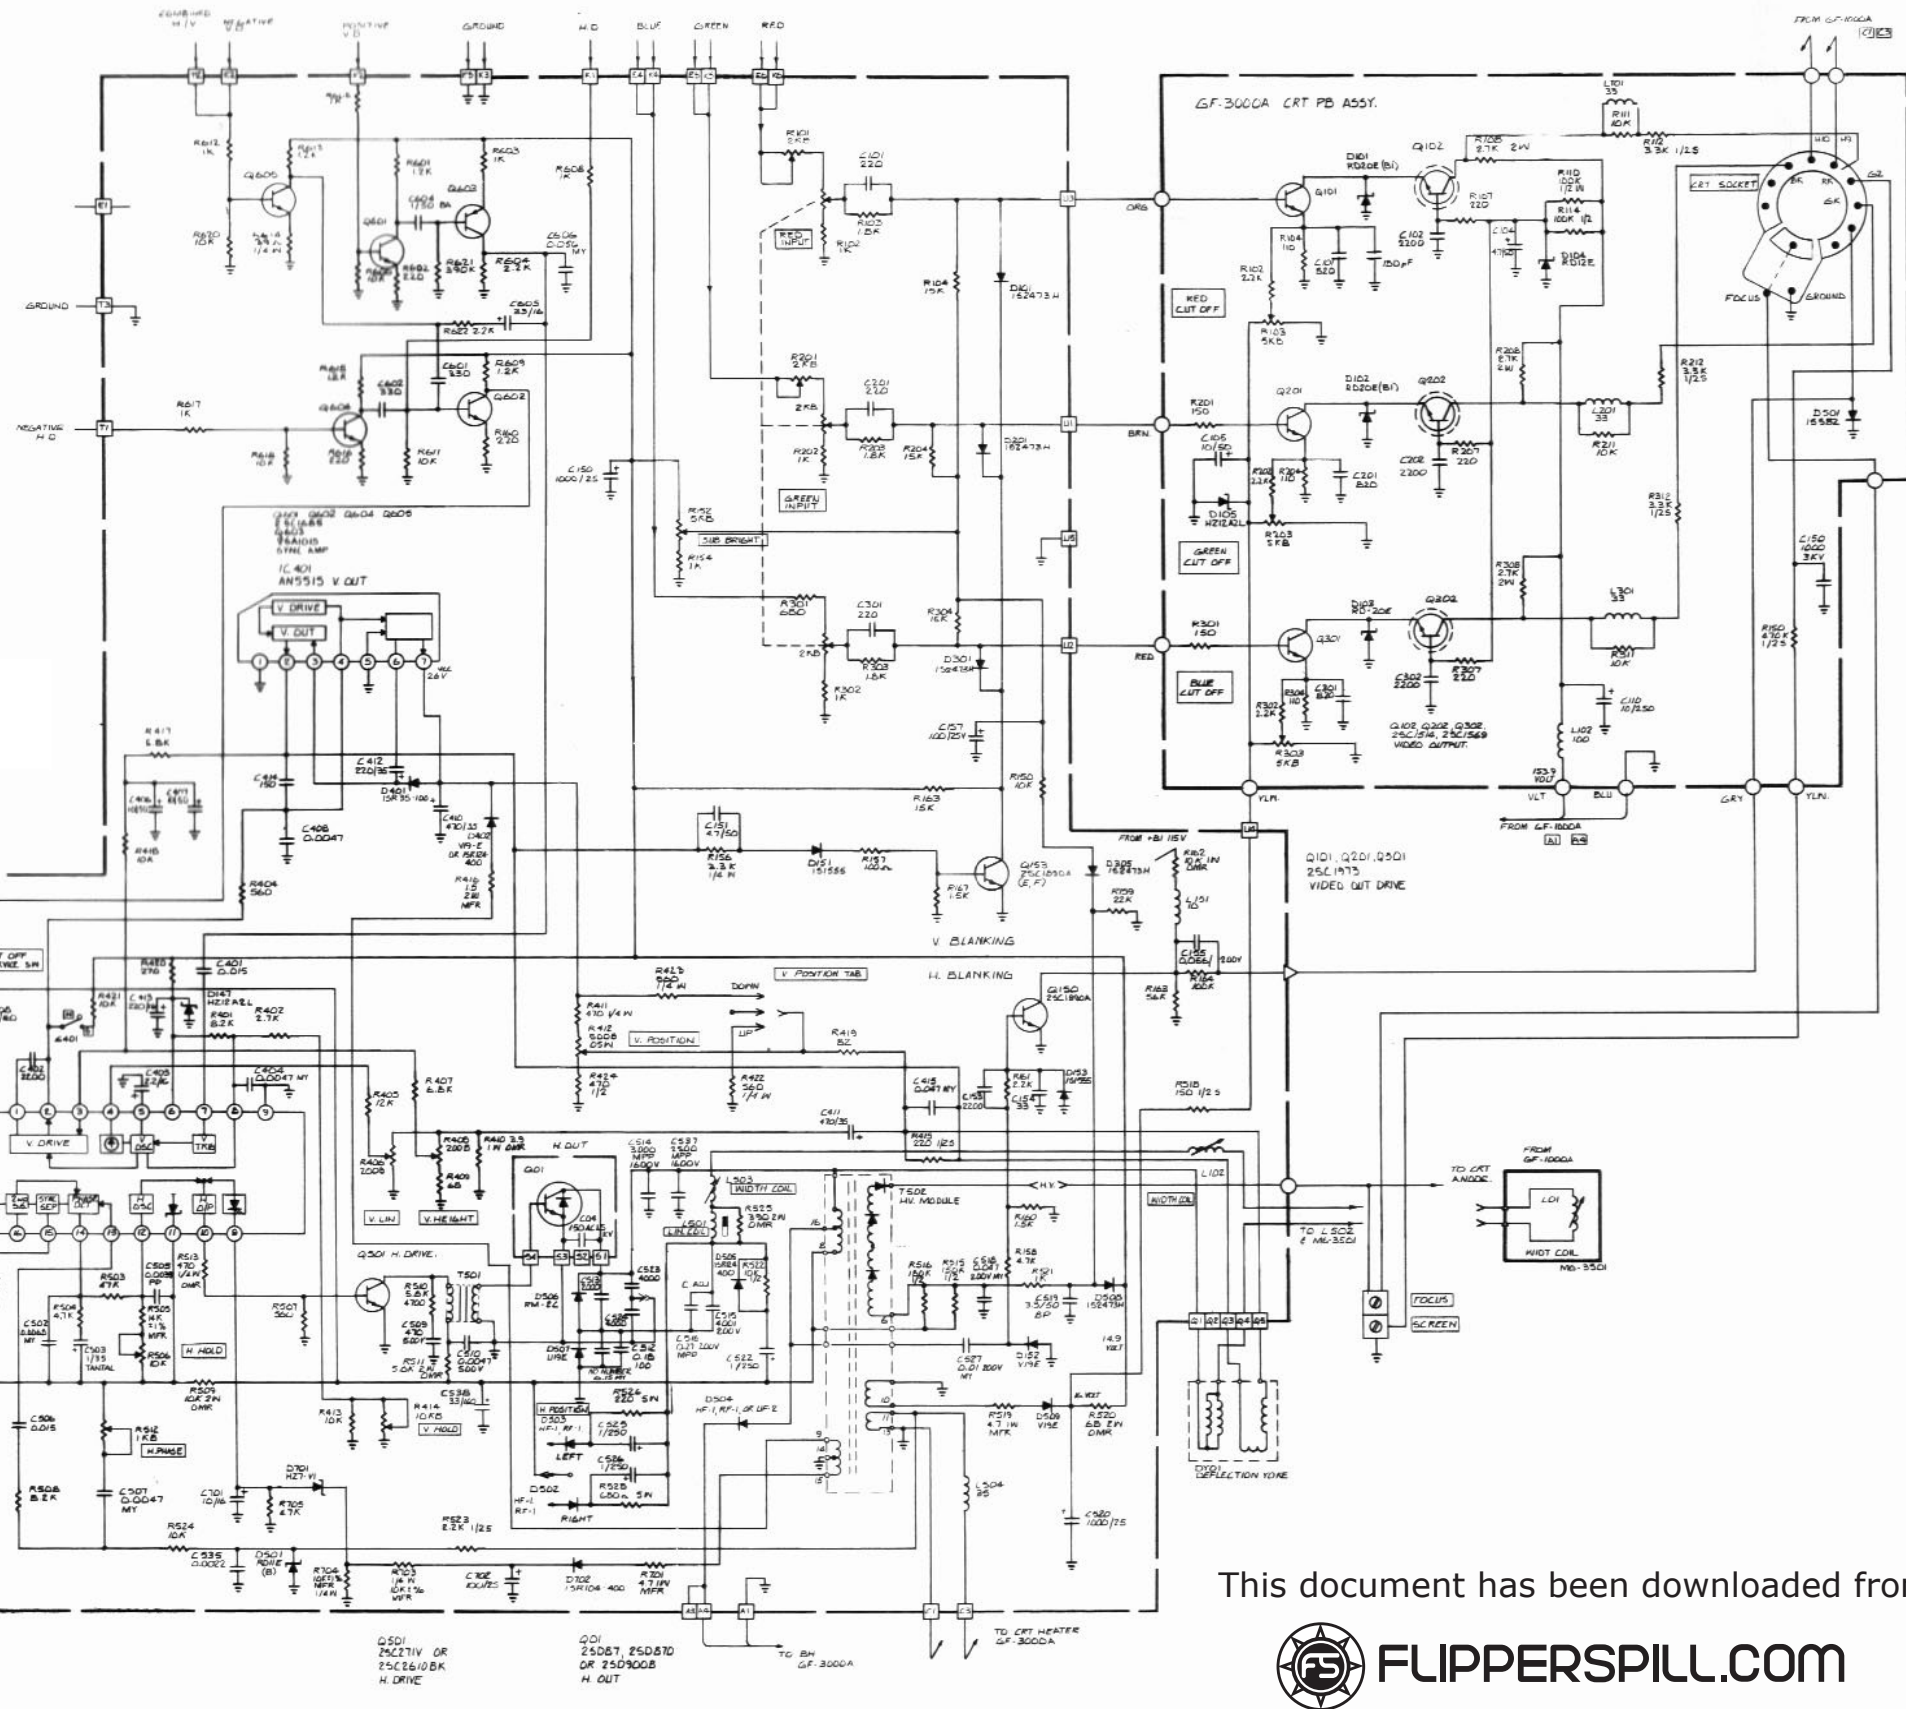

This document has been downloaded from: