




© CAPCOM 1991-1992 ALL RIGHTS RESERVED

OPERATOR'S MANUAL



This document has been downloaded from:

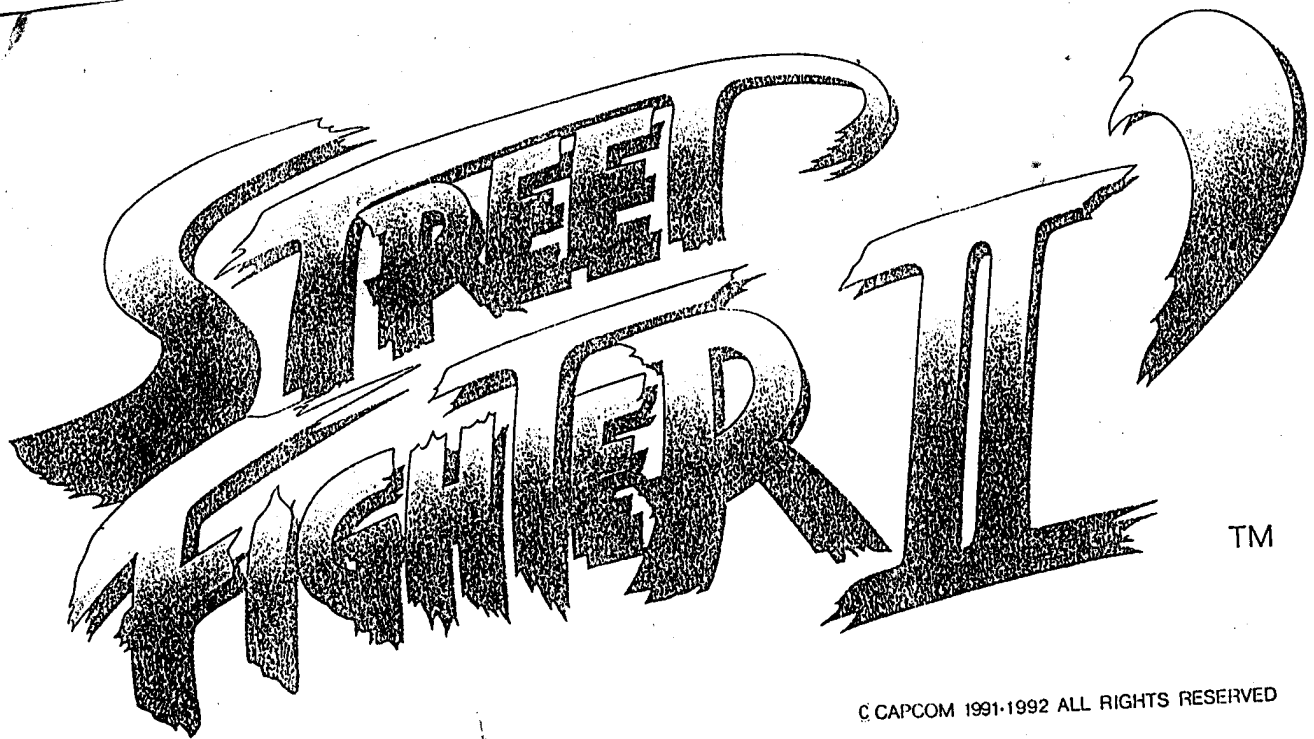

FLIPPERSPILL.COM

CAPCOM

HOW TO CONNECT THE ATTACHED HARNESS LINES

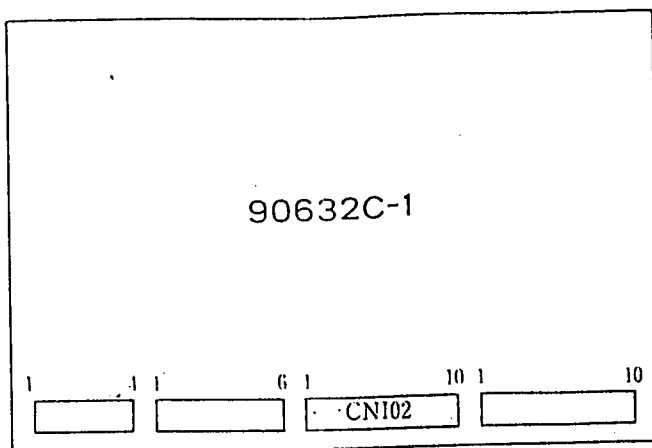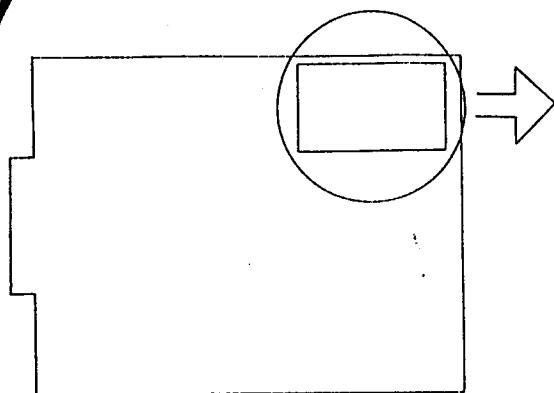

CNI02

10 PIN

GND	1	BLACK
GND	2	BLACK
1P KICK LIGHT	3	PURPLE
1P KICK MIDDLE	4	GRAY
1P KICK HEAVY	5	WHITE
N.C.	6	
2P KICK LIGHT	7	ORANGE
2P KICK MIDDLE	8	GREEN
2P KICK HEAVY	9	BLUE
N.C.	10	

DIP SW[A]

ITEM	DESCRIPTION	1	2	3	4	5	6	7	8
COIN 1	1COIN 1CREDIT	OFF	OFF	OFF					
	1COIN 2CREDITS	ON	OFF	OFF					
	1COIN 3CREDITS	OFF	ON	OFF					
	1COIN 4CREDITS	ON	ON	OFF					
	1COIN 6CREDITS	OFF	OFF	ON					
	2COINS 1CREDIT	ON	OFF	ON					
	3COINS 1CREDIT	OFF	ON	ON					
	4COINS 1CREDIT	ON	ON	ON					
COIN 2	1COIN 1CREDIT				OFF	OFF	OFF		
	1COIN 2CREDITS				ON	OFF	OFF		
	1COIN 3CREDITS				OFF	ON	OFF		
	1COIN 4CREDITS				ON	ON	OFF		
	1COIN 6CREDITS				OFF	OFF	ON		
	2COINS 1CREDIT				ON	OFF	ON		
	3COINS 1CREDIT				OFF	ON	ON		
	4COINS 1CREDIT				ON	ON	ON		
CONTINUE COIN	NORMAL							OFF	
	CONTINUE COIN							ON	

* WHEN CONTINUE COIN IS ON, GAMS STARTS WITH 2 COINS AND CONTINUES WITH 1 COIN.
 IN THIS CASE, SETTINGS OF COIN 1 AND COIN 2 ARE MEANINGLESS.
 * BOLDFACE INDICATES FACTORY SETTING.


SETTING EXPLANATION

PCB CONNECTOR

JAMMA STANDARD

CRT MONITOR

HORIZONTAL SCREEN

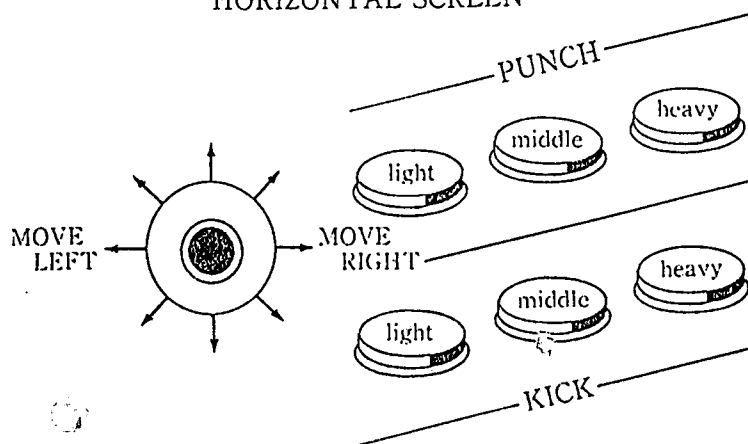

8-WAY LEVER


MOVES PLAYER TO UP/DOWN,

LEFT/RIGHT AND OTHER DIRECTIONS.


POSITIONS OF DIP SW

(THERE ARE 2 TYPES OF PCB)

1.

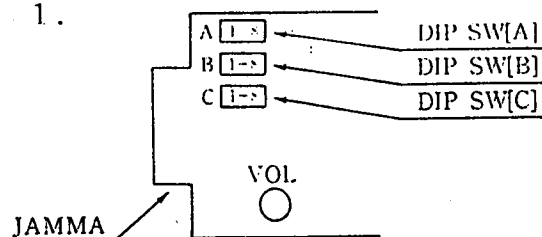

2.

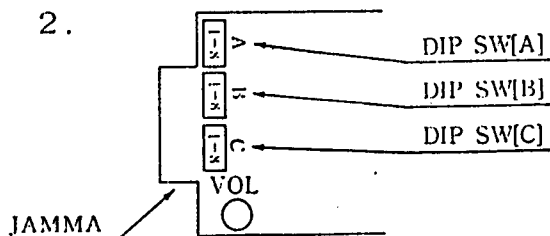

JAMMA STANDARD

SOLDER SIDE			COMPONENTS SIDE
GND	A	1	GND
GND	B	2	GND
+5V	C	3	+5V
+5V	D	4	+5V
N.C.	E	5	N.C.
+12V	F	6	+12V
	H	7	
COIN COUNTER 2	J	8	COIN COUNTER 1
(COIN LOCK OUT 2)	K	9	(COIN LOCK OUT 1)
SP(-)	L	10	SP(+)
N.C.	M	11	N.C.
VIDEO GREEN	N	12	VIDEO RED
VIDEO SYNC	P	13	VIDEO BLUE
SERVICE SW	R	14	VIDEO GND
	S	15	TEST SW
COIN SW 2	T	16	COIN SW 1
START SW 2	U	17	START SW 1
2P UP	V	18	1P UP
2P DOWN	W	19	1P DOWN
2P LEFT	X	20	1P LEFT
2P RIGHT	Y	21	1P RIGHT
2P PUNCH (light)	Z	22	1P PUNCH (light)
2P PUNCH (middle)	a	23	1P PUNCH (middle)
2P PUNCH (heavy)	b	24	1P PUNCH (heavy)
N.C.	c	25	N.C.
N.C.	d	26	N.C.
GND	e	27	GND
GND	f	28	GND

• PARTS NAME

CR7E-56DA-3.96E: (HIROSE)

OR

1168-056-009 : (KEL)

031.01309.