

TETRIS (Japan)

WIRING DIAGRAM

SOLIDER SIDE

GND 1
GND 2
+ 5V 3
+ 5V 4
5
+ 12V 6
7
8
9

SPEAKER (+)

VIDEO GREEN 12
VIDEO SYNC 13

GND 27
GND 28

PART SIDE

GND
GND
+ 5V
+ 5V
+12V


Speaker (-)

VIDEO RED
VIDEO BLUE
VIDEO GND

COIN SWITCH 1

BOMB
DOWN
LEFT
RIGHT
PUSH
START

JOYSTICK

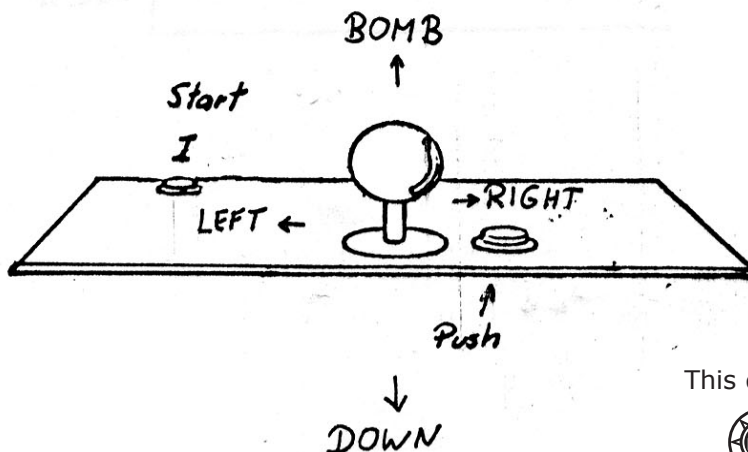

DIAGRAM

DIP SWITCH

		1	2	3	4	5	6	7	8
DIFFICULTY	LEVEL 0	OFF	OFF						
	LEVEL 2	ON	OFF						
	LEVEL 4	OFF	ON						
	LEVEL 6	ON	ON						
BOMB	YES			OFF					
	NONE			ON					
MELODY	YES				ON				
	NONE				OFF				
COIN	1COIN / 1CREDIT						OFF	OFF	
	1COIN / 2CREDIT						ON	OFF	
	2COIN / 1CREDIT						OFF	ON	
	2COIN / 1CREDIT						ON	ON	

