

JUDGE DREDD

Manual Amendment

The following corrections/changes have been made to the Judge Dredd Operations Manual. Please keep this amendment with your manual.

Page 1-33 Pricing Table Changes on USA, Germany, and Finland.

Country	Coin Chutes				Games/Coins	Display	Pricing Adjustments A3							
	Left	Center	Right	4th Chute			02	03	04	05	06	07	08	09
USA	25¢	\$1.00 ²	25¢	-	1/50¢, 2/75¢, 3/\$1 ²	50¢, 75¢, \$1.00								
	25	\$1.00	25¢	-	1/3X25¢ ²	USA1 1/\$0.75								
	25	\$1.00	25¢	-	1/50¢, 2/\$1 ²	USA 2/\$1.00								
	25	\$1.00	25¢	-	1/50¢, 3/\$1.00 ²	USA 3/\$1.00								
	25	\$1.00	25¢	-	1/2x25¢, 2/4x25¢, 3/\$1.00 ²	3/\$1.00 Coin								
	25	\$1.00	25¢	-	1/2x25¢, 2/\$1.00, 3/\$1.50, 6/\$2.00 ²	USA 6/\$2.00								
	25	\$1.00	25¢	-	1/2x25¢, 2/\$1.00, 3/\$1.50, 5/\$2.00 ²	USA 5/\$2.00								
	25	\$1.00	25¢	-	1/3X25¢, 2/\$1.50, 4/\$2.00 ²	1/75, 4/\$2.00								
	25	\$1.00	25¢	-	1/2x25¢, 2/\$1.00, 4/\$1.50, 6/\$2.00 ^{1,2}	6/\$2.00 4/\$1.50								
Canada	25¢	-	\$1.00	-	1/50¢, 2/75¢, 3/\$1	CANADA 1								
				-	1/50¢, 2/\$1 ²	CANADA 2								
Austria	5ech	10ech	10ech	-	1/2x5ech, 3/2x10ech ²	AUSTRIA								
	5ech	-	10ech	-	2/5ech, 5/10ech	CUSTOM	02	00	05	00	01	00	01	00
Australia	20¢	\$1	\$1	\$2	1/\$1, 3/\$2 ²	AUSTRALIA 1								
	20¢	\$1	\$1	\$2	1/\$1, 2/\$2	AUSTRALIA 2								
U.K.	£1.00	50P	20P	10P	1/3x10P, 2/50P, 4/£1 ²	U. KINGDOM								
Switzerland	1Fr	2Fr	5Fr	-	1/1Fr, 3/2Fr, 7/5Fr ²	SWISS 1								
	1Fr	2Fr	5Fr	-	1/2Fr, 2/3Fr, 3/4Fr, 5/5Fr	SWISS 2								
Belgium	5Fr	20Fr	50Fr	-	1/4x5Fr, 1/20Fr, 3/50Fr ²	BELGIUM								
Germany	1DM	2DM	5DM	-	1/2DM, 2/3DM, 3/4DM, 5/5DM ²	GER. 1/2DM								
				-	1/1DM, 2/2DM, 6/5DM ²	GER. 1/1DM								
				-	1/1DM, 2/2DM, 6/5DM ^{1,2}	GER. 6/5DM								
				-										
Holland	1G	-	1G	-	1/1G ²	HOLLAND								
Sweden	1Kr	5Kr	10Kr	-	1/5x1Kr, 1/5Kr, 2/10Kr ^{1,2}	SWEDEN 1								
	5Kr	5Kr	5Kr	-	1/5Kr ²	SWEDEN 2								
France	1Fr	5Fr	10Fr	20Fr	1/3x1Fr, 2/3Fr, 5/10Fr, 10/20Fr ^{2,3}	TARIF 1								
	1Fr	5Fr	10Fr	20Fr	1/2x1Fr, 3/5Fr, 7/10Fr, 14/20Fr ^{2,3}	TARIF 2								
	1Fr	5Fr	10Fr	20Fr	1/5Fr, 3/10Fr, 7/2x10Fr, 7/20Fr ^{1,2,3}	TARIF 3								
	1Fr	5Fr	10Fr	20Fr	2/5Fr, 4/10Fr, 9/2x10Fr, 9/20Fr ^{2,3}	TARIF 4								
	1Fr	5Fr	10Fr	20Fr	2/5Fr, 5/10Fr, 11/2x10Fr, 11/20Fr ^{2,3}	TARIF 5								
	1Fr	5Fr	10Fr	20Fr	1/5Fr, 3/10Fr, 9/20Fr ^{2,3}	TARIF 6								
Italy	500L	500L	500L	-	1/500L ²	ITALY 1								
	500L	500L	500L	-	1/2x500L, 3/4x500L ^{1,2}	ITALY 2								
	500L	500L	500L	-	1/500L, 2/1000L	ITALY 3								
Spain	100P	-	500P	-	1/100P, 6/500P ²	SPAIN								
	25P	-	100P	-	1/25P, 5/100P	CUSTOM	01	00	04	00	01	04	01	00
	25P	-	100P	-	1/25P, 4/100P	CUSTOM	01	00	04	00	01	00	01	00
	25P	-	100P	-	1/2x25P, 2/100P	CUSTOM	01	00	04	00	02	00	01	00
	25P	-	100P	-	1/2x25P, 3/100P	CUSTOM	03	00	12	00	04	00	01	06
Japan	100¥	-	100¥	-	1/100¥ ²	JAPAN								
Chile	Token	-	Token	-	1/1Token ²	CHILE								
Denmark	1Kr	5Kr	10Kr	-	1/3x1 Kr, 3/5 Kr, 7/10Kr ²	DENMARK								
Finland	1Mka	-	5Mka	-	1/2x1Mka, 3/5Mka ²	FINLAND 1								
	1Mka	-	5Mka	-	1/3x1Mka, 2/5Mka ²	FINLAND 2								
New Zealand	\$1.00	-	\$2.00	-	1/\$1, 3/\$2	NEW ZEALAND 1								
	\$2.00	-	\$1.00	-	1/\$1, 3/\$2, (\$2-\$1 door)	NEW ZEALAND 2								
Norway	5Kr	-	10Kr	-	1/5Kr, 2/10Kr, 5/20Kr ²	NORWAY								
Argentina	10¢	10¢	10¢	-	1/1Token ²	ARGENTINA								
Greece	10D	20D	50D	-	1/2x10D, 1/20D, 3/50D	GREECE								
Antilles	25¢	25¢	1G	-	1/25¢, 4/1G	ANTILLES								
Netherlands	1Hfl	2.5Hfl	2.5Hfl	-	1/1Hfl, 3/2.5Hfl	NETHERLANDS								
Hungary	10F	10F	20F	-	1/1x20F, 1/2x10F, 3/2x20F ²	HUNGARY								

Note: 1. Factory Default. 2. Standard Setting - Change by pressing Enter button. 3. Other functions are also affected.
* Only if Bill Acceptor and Center Coin Chute are available.

Flipper Assemblies: Old Flipper #

A-15205-R-2

A-15205-L-2

A-15205-R

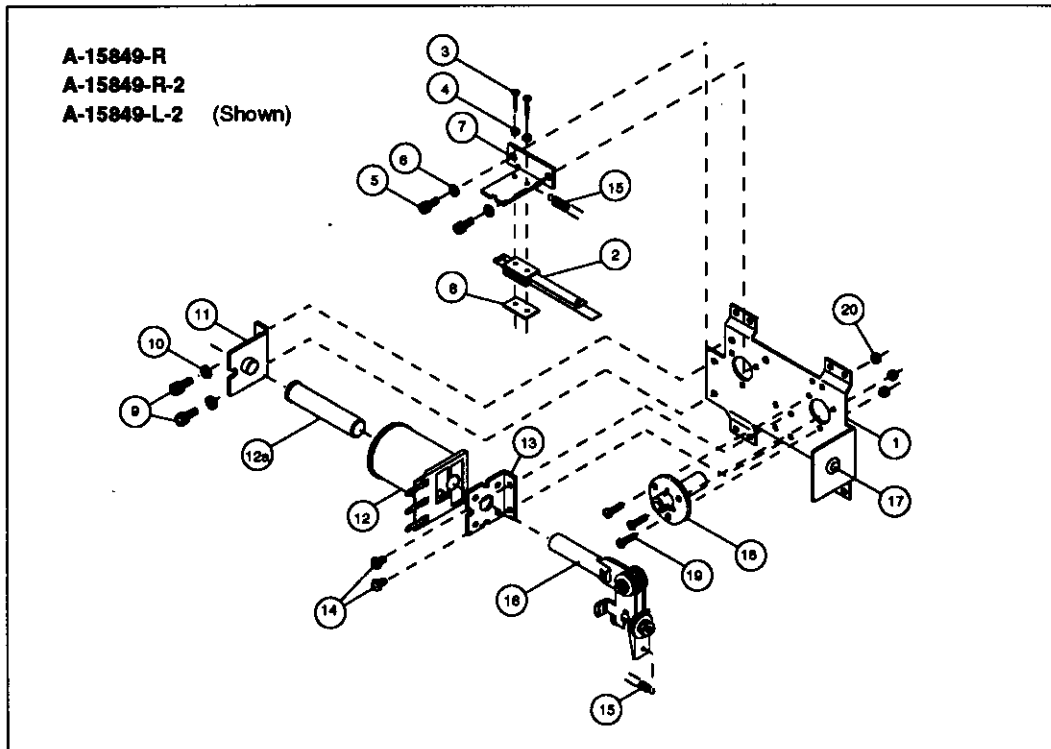
New Flipper #

A-15849-R-2

A-15849-L-2

A-15849-R

Changed Item #16 from B-13882-L(R) to A-15848-L(R).

**A-15849-R-2 & A-15849-L-2****Flipper Assembly****Item Part Number Description**

- | | | |
|-----|------------------|----------------------------------|
| 1. | B-13104-R | Flipper Base Assy., Right |
| | B-13104-L | Flipper Base Assy., Left |
| 2. | SW-1A-194 | Switch Assembly |
| 3. | 4701-00002-00 | Lockwasher, #8 Split |
| 4. | 4105-01019-10 | Sh. Metal Screw, #5 x 5/8 P-RH-A |
| 5. | 4008-01079-05 | Mach. Screw, 8-32 x 5/16 H-SOC |
| 6. | 4701-00003-00 | Lockwasher, #8 Split |
| 7. | 01-9375 | Switch Mounting Bracket |
| 8. | 20-6516 | Speednut, Tinnerman |
| 9. | 4010-01066-06 | Cap Screw, 10-32 x 3/8, SH |
| 10. | 4701-00004-00 | Lockwasher, #10 Split |
| 11. | A-12360 | Flipper Stop Assembly |
| 12. | FL-11629 | Flipper Coil (Blue) |
| a) | 03-7066-5 | Coil Tubing |
| 13. | 01-7695 | Solenoid Bracket |
| 14. | 4006-01017-04 | Mach. Screw, 6-32 x 1/4 P-RH-S |

Item Part Number Description

- | | | |
|-----|------------------|-------------------------------------|
| 15. | 10-364 | Spring |
| 16. | A-15848-R | Crank Link Assembly, Right |
| | A-15848-L | Crank Link Assembly, Left |
| a) | A-17050-R | Flipper Crank Assembly, Right |
| | A-17050-L | Flipper Crank Assembly, Left |
| b) | A-15847 | Flipper Link Assembly |
| c) | 02-4676 | Link Spacer Bushing |
| d) | 4010-01066-14 | Cap Screw, 10-32 x 7/8 SH |
| e) | 4700-00023-00 | Flatwasher, 5/8 x 13/64 x 16ga. |
| f) | 4701-00004-00 | Lockwasher #10 Split |
| g) | 4410-01132-00 | Nut, 10-32 ESN |
| 17. | 23-6577 | Bumper Plug, 5/8" |
| 18. | 03-7568 | Flipper Bushing |
| 19. | 4006-01005-06 | Mach. Screw, 6-32 x 3/8 P-PH |
| 20. | 4406-01117-00 | Nut, 6-32 Hex |

Associated Parts for Left & Right Flippers:

23-6695 Flipper Rubber Ring, 1-1/2" (3 Used) and 20-9250-6 Flipper & Shaft-White (3 Used).

A-15849-R Flipper Assembly
(Parts listed replace same items of A-15849-R-2)

Item Part Number Description

- | | | |
|-----|----------|--------------------|
| 12. | FL-11630 | Flipper Coil (Red) |
|-----|----------|--------------------|

Page 3-12 Opto SW-7 P.C.B. Circuit Diagram
 Added Switch Row 7, White-Violet, from J209-8 to J3-11.

